



## Facestock

A matte white polyester facestock with a smooth, absorbent ink-receptive top coating.

Basis Weight: N/A  
Caliper: 0.075 mm ± 10% ISO 534

## Adhesive

A general purpose permanent, solvent based adhesive.

## Liner

A super-calendared Embossing polycoated white glassine paper .

Basis Weight: 100 g/m<sup>2</sup> ± 10% ISO 536  
Caliper: 0.080mm ± 10% ISO 534

## Performance data

Loop Tack (st, st) - FTM 9: 9.0  
20 min 90° Peel (st, st) - FTM 2: 5.5  
24 hour 90° Peel (st, st) - FTM 2: 7.0  
Min. Appl. Temp. -4°C  
Service Temp Labeling after 24 hours. -40° to +149°C

## Adhesive Performance

This is an excellent, general-purpose industrial grade clear adhesive, featuring high initial tack, ultimate adhesion and low adhesive ooze. It is resistant to many solvents

## Applications and use

The special grid on the adhesive layer can drive away air which hides between label and substrate to ensure the label will not create bubble. Especial on those conditions, such as the big size label etc. This product features excellent tear strength, heat resistance, dimensional stability, opacity and chemical resistance.

This product is suitable for use in a wide range of durable labeling applications. The product remain reclosure performance in a short tim.

It is UL recognized . See file # MH20557for specific details.

The above does not represent any guarantee or warranty and the Purchaser must independently determine the suitability of the products for the Purchaser's purposes.

## Conversion/printing

The top coated face material is design and suit for all the usual printing techniques. Specially formulated inks are normally not necessary.

Also suitable for thermal transfer printing.

Ink/ribbon testing is always recommended before production.


This product can be die cut and stripped at high speeds on most web-fed presses. Harden treated and sharp dies, preferably in flat-bed, are important to ensure smooth conversion.

Need avoid too much re-winding tension to causing bleeding.

## Shelf life

One year when stored at 23 ± 2°C at 50 ± 5% RH.

# Fasson® 75 micron MAT WH PET TC/S8040E/ Embossing Poly-coated Liner ni

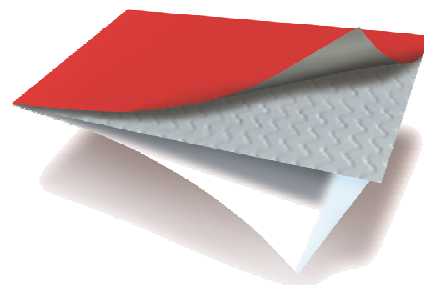

75micron MAT WH PET TC

S8040E

Embossing Poly-coated

## Asia Pacific

32/F., Skyline Tower  
39 Wang Kwong Road  
Kowloon Bay, Kowloon,  
Hong Kong  
Tel: +852 2802-9618

### Warrenty

All statements, technical information and recommendations about AVERY DENNISON products are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All AVERY DENNISON products are sold with the understanding that PURCHASER has independently determined the suitability of such products for its purposes. AVERY DENNISON products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Any product shown to the satisfaction of AVERY DENNISON within the time provided to be so defective shall be replaced without charge of AVERY DENNISON may issue credit in such amount as it seems reasonable however, in no event shall AVERY DENNISON be responsible for claims beyond the replacement value of the defective product or in any way

liable or responsible for consequential or incidental damages. NO EXPRESS WARRANTIES, WHETHER OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR USE, OR OTHERWISE, EXCEPT AS SET FORTH ABOVE (WHICH IS MADE EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES) SHALL APPLY TO PRODUCTS SOLD BY AVERY DENNISON. AVERY DENNISON SPECIFICALLY DISCLAIMS AND EXCLUDES ALL OTHER SUCH WARRANTIES. NO WAIVER, ALTERNATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON. No salesman, representative, or agent of AVERY DENNISON is authorized to give any guarantee, warranty or make any representation contrary to the above.

